

TEXPRO®

SYQ 高温涌泉染色机
SYQ H.T. DYEING MACHINE

SYQ 高温涌泉染色机

SYQ H.T. DYEING MACHINE

采用“罐式外形+U形导布管”的模块化结构，集罐式染色机低浴比、大载量布槽配置与长管式染色机适应长纤及弹力布染色的工艺应用优点于一身。其在处理涤氨、人棉、TC、CVC、提花、罗马布等面料时均有不俗的表现，尤其是易折痕、怕拉伸的织物，三枝涌泉染色机（喷嘴配置可选）具有针对性的效果。其单次运行载量得到加大，单位耗水、耗电、耗蒸汽、耗助剂等指数显著降低。

SYQ series H.T. (High-Temperature) Dyeing Machine is a dyeing machine series developed for fabrics with low tension processing requirement. The 'O'-shaped and large-size chamber structure ensure a high loading capacity, while the original invented 'U'-shaped fabric guiding tube provides a space for running fabric to relax and shrink. The built-in lifter reel device shortens the lifting height and lowers the fabric running tension. Such design is tailor made for tension-sensitive fabrics and it may reduce the risk of generating stretch marks and tension marks. Compared with the traditional tubular dyeing machines, the liquor ratio of SYQ series dyeing machine can be as low as 1:4, which is more environmentally friendly in dyeing and finishing industry.

SYQ31	1T	2T	3T	4T	6T
喷嘴数量 Number Of Nozzles	1	2	3	4	6
载量 Capacity (kg)	300	600	900	1200	1800
尺寸 Size 长 L*宽 W*高 H(mm)	3880*5590*3710	5720*5590*3710	7330*5590*3710	8860*5840*3710	12180*5910*3810

SYQ32	1T	2T	3T	4T	6T
喷嘴数量 Number Of Nozzles	1	2	3	4	6
载量 Capacity (kg)	300-350	600-700	900-1050	1200-1400	1800-2100
尺寸 Size 长 L*宽 W*高 H(mm)	4010*5830*3980	5720*5660*3980	7400*5720*3980	8860*5960*3980	12180*6370*4080

SYQ M	25	50	75	100	150	200
载量 Capacity (kg)	20-30	40-60	60-75	80-110	110-150	160-200
尺寸 Size 长 L*宽 W*高 H(mm)	2320*3710*2700	2845*4710*2970	2845*4710*2970	2915*4710*2970	3000*4710*2970	3485*5380*3715

如有需求特殊载量，详情请咨询我司营业顾问

If any special request for loading capacity, please contact our sales team for details.

缸体所有和染液直接接触的不锈钢板材均采用 S31603/SUS316L/SUS316Ti 高度抗腐蚀不锈钢制造。

All stainless steel plates in touch with the dyeing liquid in the machine body are made of S31603 / SUS316L / SUS316Ti highly corrosion resistant stainless steel.



设备特点

SALIENT FEATURE



内置无胶条提布轮

Built-in adhesive free fabric lifting wheel



泵前刮毛器

Pump front scraper



下沉式摆布

Sunken layout



自动布槽调节板


Automatic groove adjustment plate

布料类型


FABRIC TYPES

在特定的行机条件下，部分典型的适染布种


The SYQ is suitable for a wide range of knitted and woven fabrics. Due to its high versatility, it is particularly recommended for synthetic or cellulose fiber blends in knitted and warp-knitted fabrics.

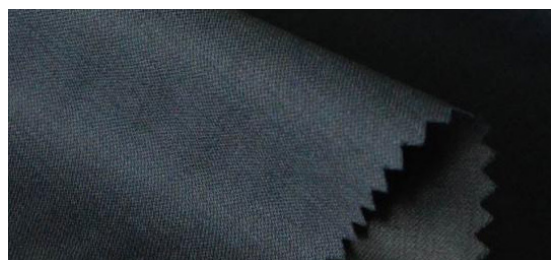


厚重梭织布 Heavy Woven Fabric

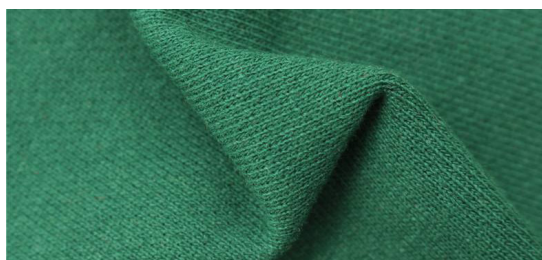


平纹布 Jersey Fabric

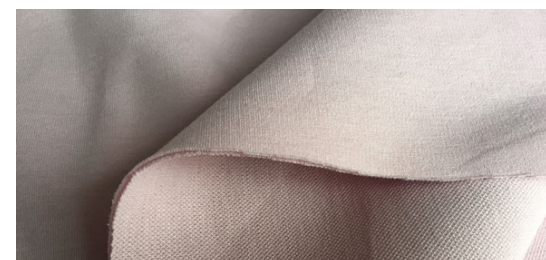

空气层布 Scuba Knitting Fabric

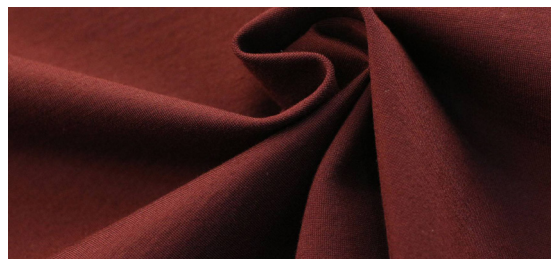

罗马布 Ponte-De-Roma Fabric

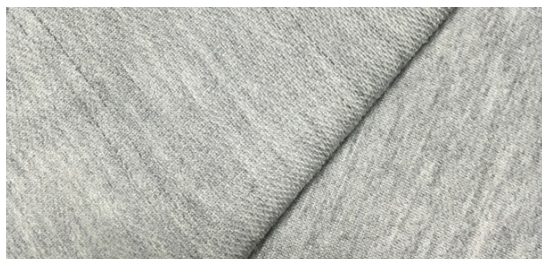

卫衣布 French Terry Fabric



绒布 Flannelette

以上参数仅供参考

Above information is a selection of fabrics suitable for processing on SYQ H.T. dyeing machine. This selection is for reference only. Please contact our representative for a comprehensive list of fabrics.

本说明书中参数、图片仅供参考，本公司保留最终的修改权利而不再另行通知。

The parameters & pictures shown in this catalogue are only for your reference. We reserve the right to modify technologies without prior notice.

电话 (Tel): +86 757 8802 0263 / +86 757 8830 3380

邮箱 (E-mail): sales@texpro-group.com

网站 (Web): www.texpro-group.com



三技精密技术 (广东) 股份有限公司

TEXPRO PRECISION TECHNOLOGY (GUANGDONG) CO., LTD

地址 : 广东省佛山市禅城区华宝南路 1 号

Add: No.1, South Huabao Road, Chancheng District, Foshan,
Guangdong, China.

广东三技克朗茨机械科技有限公司

TEXPRO & STENTEX MACHINERY TECHNOLOGY CO., LTD.

地址 : 广东省佛山市三水区中心科技工业区大塘园 A 区 69-2 号

Add: No.69-2, Area A, Datang Park, Central Technology Industrial
Zone, Sanshui District, Foshan, Guangdong, China.